




SERIES LT/4™ PNEUMATIC PRESS

The **PEMSERTER® Series LT/4™ press** is designed to install unified or metric self-clinching nuts, studs, and standoffs requiring three tons of insertion force or less.

Specifications

Ram Force	26.7 kN
Control System	Pneumatic Logic
Pressure System Type	Pneumatic / Wedge
Air Requirements*	6 to 7 BAR
Throat Depth	25.4 cm
Height	71.1 cm On Stand - 139.7 cm
Width	Press Base - 20.3 cm
Weight	Press - 172 kg With Stand - 195 kg

*1 psi = 0.07 bar. 1 bar = 14.5 psi.

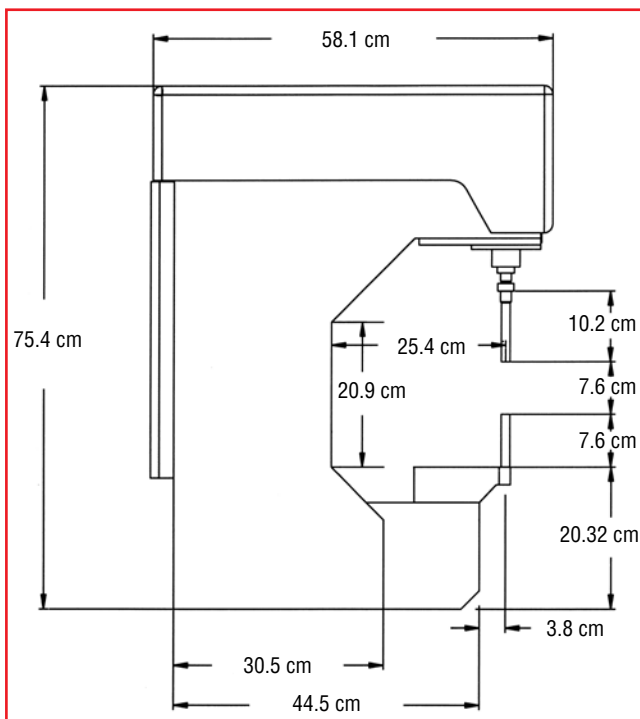

Features and Benefits

- ◆ Pneumatic power for speed, consistency, and simple operation. Requires shop air only.
- ◆ Integral point-of-operation safety.
- ◆ Adjustable positive ram stop.
- ◆ Rapid tooling changeover, perfect for short production runs.
- ◆ 25.4 cm throat depth.
- ◆ Large parts tray with dividers.
- ◆ One-year parts warranty and two-year limited warranty on pneumatic components.

QX4™ MANUAL TURRET TOOL SYSTEM

The PEMSERTER® QX4™ Turret Tool System provides an efficient method to quickly change between four different anvil tools. The one-handed operation of this tool allows an operator to install four different types and/or sizes of fasteners with one set-up. The QX4 Turret Tool System can be easily installed on all new and existing PEMSERTER® Series LT/4® presses.

- Lower installed cost. Four different fasteners installed with one machine set-up.
- Increased productivity. Set-up time reduced. Turret is easily rotated by hand and positively locks in place.
- Reduced WIP inventory. No need to stage product for additional hardware requirements.
- Reduced capital equipment cost. No need for multiple machines in a work cell production.
- Uses existing tools. 4 positions accept standard PEMSERTER 3" anvils.
- Reduced risk of missing a fastener or damaging work-piece. Each position is color-coded with matching color coded parts trays.
- Works with press safety systems. Just set-up for one of the fasteners and the installation stroke will do the rest.
- Set installation force to the highest force needed of the four installations for most applications. Consult factory for applications that require vastly different installation forces.
- Star turret design for fastener-type installations that are more difficult to access.
- Turret easily rotated by hand.
- Turret easily removed and reinstalled with no realignment needed.



*Specifications subject to change without notice.
Check our website for the most current version of this bulletin.*

© 2008, PennEngineering

PennEngineering®



North America: Danboro, PA USA • E-mail: info@pemnet.com • Tel: +1-215-766-8853 • Fax: +1-215-766-0143 • 800-237-4736 (USA Only)
Europe: Galway, Ireland • E-mail: europe@pemnet.com • Tel: +353-91-751714 • Fax: +353-91-753541
Asia/Pacific: Singapore • E-mail: singapore@pemnet.com • Tel: +65-6-745-0660 • Fax: +65-6-745-2400
Shanghai, China • E-mail: china@pemnet.com • Tel: +86-21-5868-3688 • Fax: +86-21-5868-3988

Visit our PEMNET™ Resource Center at www.pemnet.com