




RIGHT ANGLE

CLINCH

FASTENERS

# BULLETIN

The *edge* you've been waiting for™

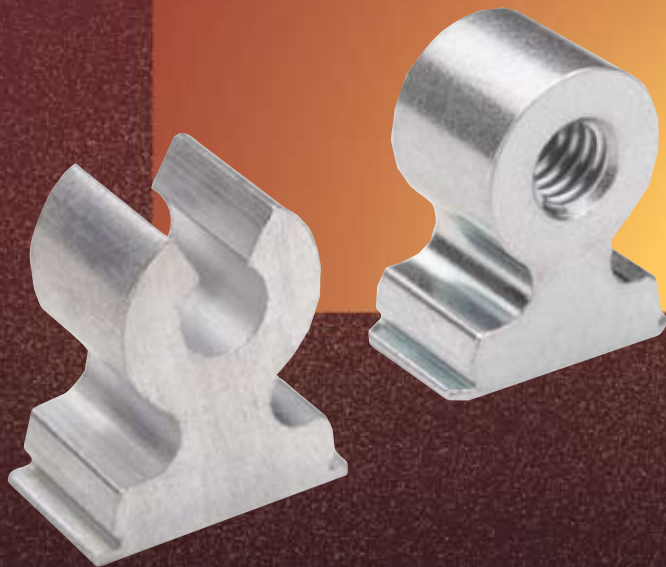

RA 507

Revised 1009

# PEM® R'ANGLE® RIGHT ANGLE CLINCH FASTENER – TYPES RAA™ AND RAS™

Self-clinching PEM® R'ANGLE® fasteners provide you with strong right angle attachment points in sheets as thin as .040" / 1.02 mm.

R'ANGLE fasteners are cost-effective replacements for:

- ***bent edge tabs***
- ***bent center tabs***
- ***bent flanges***
- ***angle brackets***
- ***tack welds***
- ***loose hardware***

Simply press this fastener into a properly sized rectangular mounting hole. It is held permanently in the sheet or panel using the same high-performance, self-clinching technology that our products have employed since 1942.

Now you can securely attach another sheet or component perpendicular to the sheet in which the R'ANGLE fastener is installed. For Type RAA, attachment is easily made using thread forming screws resulting in a thread fit which resists vibration and has excellent torque resistance.\* Type RAS fasteners are threaded and attachment is simply made using a standard screw. For either type, the holding power of the fastener is unaffected by the repeated removal and reinstallation of the screw.

PEM® R'ANGLE fasteners provide many advantages over bent tabs and flanges, including:

- ***more predictable designs***
- ***material savings***
- ***tighter design control***
- ***improved shielding characteristics***
- ***reduction of loose hardware***
- ***fewer assembly steps***
- ***unmarred panel surfaces***

\* As thread forming screws do not generate metal residue, they are widely used in electrical and electronic assemblies.



Patented

Type RAA (Aluminum) For  
Thread-forming Screws



Type RAS (Steel)  
Threaded




***For mounting to P.C. Boards  
using conventional surface mount  
techniques, see  
ReelFast®  
SMT R'ANGLE®  
fasteners in  
PEM® Bulletin  
SMT.***




PEM Type SMTRA


# TYPE RAA - ALUMINUM SELF-TAPPING RIGHT ANGLE FASTENER

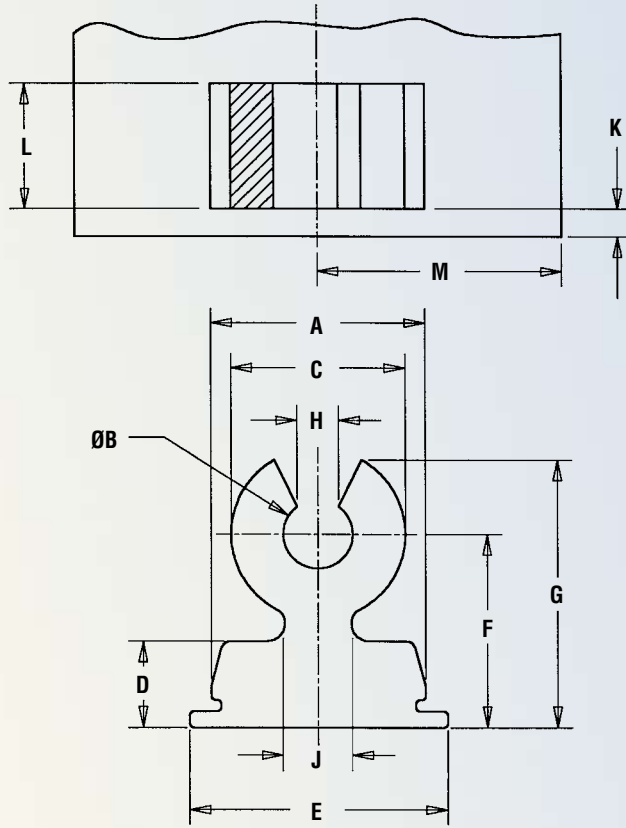

Metric part can be identified by flat top

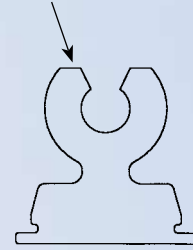

### Part Number Designation

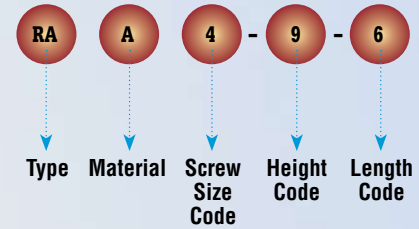


All dimensions are in inches.

UNIFIED	Thread Form Screw Size	Type	Material	Screw Size Code	Height Code	Length Code	Length L ±.003	Min. Sheet Thickness	Hole Size In Sheet +.002 - .001	A ±.003	ØB ±.004	C Nom.	D Nom.	E ±.006	Height F ±.006	G Nom.	H ±.007	J Nom.	Min. Part Face to Edge K	Min. Dist. Hole C/L To Edge M
	#4-40	RA	A	4	9	6	.183	.040	.312 x .187 .312 x .250	.308	.100	.250	.125	.368	.281	.389	.054	.096	.040	.35
8						.246	.375 x .250 .375 x .312													
#6-32	RA	A	6	10	8	.246		.040	.406 x .281 .406 x .375	.402	.145	.350	.125	.462	.375	.525	.078	.157	.040	.58
					12	.371	.406 x .375													
#8-32	RA	A	8	12	9	.277		.040	.406 x .281 .406 x .375	.402	.145	.350	.125	.462	.375	.525	.078	.157	.040	.58
					12	.371	.406 x .375													


All dimensions are in millimeters.

METRIC	Thread Form Screw Size	Type	Material	Screw Size Code	Height Code	Length Code	Length L ±0.08	Min. Sheet Thickness	Hole Size In Sheet +0.05 -0.03	A ±0.08	ØB ±0.1	C Nom.	D Nom.	E ±0.15	Height F ±0.15	G Nom.	H ±0.18	J Nom.	Min. Part Face to Edge K	Min. Dist. Hole C/L To Edge M
	M3 x 0.5	RA	A	M3	7	4	3.89	1.02	8 x 4 8 x 6	7.89	2.77	6.35	3.18	9.42	7	9.27	1.5	2.87	1.02	9.1
6						5.89	10 x 7 10 x 9													
M4 x 0.7	RA	A	M4	9	7	6.89		1.02	10 x 7 10 x 9	9.89	3.68	8.89	3.18	11.43	9	12.19	1.97	4.06	1.02	14.7
					9	8.89	10 x 7 10 x 9													


# TYPE RAS - STEEL THREADED RIGHT ANGLE FASTENER

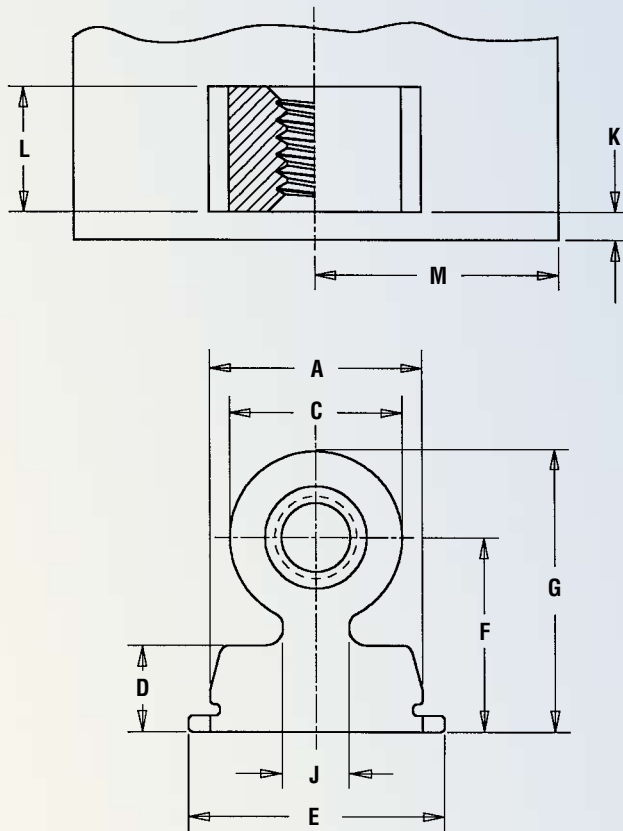

Metric part can be identified by flat top



## Part Number Designation

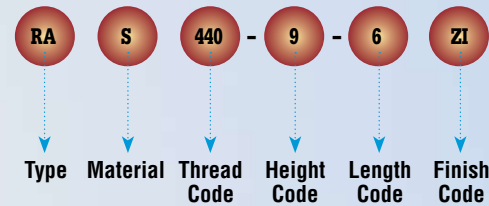

All dimensions are in inches.

UNIFIED	Thread Size	Type	Material	Thread Code	Height Code	Length Code	Length L ±.003	Min. Sheet Thickness	Hole Size In Sheet +.002 -.001	A ±.003	C Nom.	D Nom.	E ±.006	Height F ±.006	G Nom.	J Nom.	Min. Part Face to Edge K	Min. Dist. Hole C/L To Edge M
	.112-40 (#4-40)	RA	S	440	9	4	.121	.040	.312 x .125	.308	.250	.125	.370	.281	.406	.096	.040	.30
6						.183	.312 x .187		.35									
8						.246	.312 x .250		.43									
.138-32 (#6-32)	RA	S	632	10	4	.121	.040	.375 x .125	.371	.300	.125	.433	.312	.462	.141	.040	.35	
					8	.246		.375 x .250										.50
					10	.308		.375 x .312										.55
.164-32 (#8-32)	RA	S	832	12	6	.183	.040	.406 x .187	.402	.350	.125	.464	.375	.550	.157	.040	.40	
					9	.277		.406 x .281										.58
					12	.371		.406 x .375										.65

All dimensions are in millimeters.

METRIC	Thread Size x Pitch	Type	Material	Thread Code	Height Code	Length Code	Length L ±0.08	Min. Sheet Thickness	Hole Size In Sheet +0.05 -0.03	A ±0.08	C Nom.	D Nom.	E ±0.15	Height F ±0.15	G Nom.	J Nom.	Min. Part Face to Edge K	Min. Dist. Hole C/L To Edge M
	M3 x 0.5	RA	S	M3	7	3	2.89	1.02	8 x 3	7.89	6.35	3.18	9.47	7	9.78	2.87	1.02	7.6
4						3.89	8 x 4		9.1									
6						5.89	8 x 6		10.7									
M4 x 0.7	RA	S	M4	9	4	3.89	1.02	10 x 4	9.89	8.89	3.18	11.48	9	13.21	4.06	1.02	10	
					7	6.89		10 x 7										14.7
					9	8.89		10 x 9										16.3

# MATERIAL & FINISH SPECIFICATIONS

	Threads	Fastener Materials		Standard Finishes		For Use In Sheet Hardness:(2)	
Type	Internal, ANSI B1.1, 2B ANSI/ASME B1.13M, 6H	6061-T6 Aluminum	Sintered Steel	Zinc Plated, 5µm, Colorless (1)	Natural	HRB 45 / HB 77 or Less	HRB 60 / HB 107 or Less
RAA		•			•	•	
RAS	•		•	•			•
Part Number Codes for Finishes				ZI	None		


- (1) See PEM Technical Support section of our web site for related plating standards and specifications.  
 (2) HRB - Hardness Rockwell "B" Scale. HB - Hardness Brinell.

## PERFORMANCE DATA<sup>(1)</sup>

### Type RAA

UNIFIED	Screw Size Code	Height Code	Length Code	Thread Forming Torque (in. lbs.)	Max. Rec. Tightening Torque (in. lbs.)	Test Sheet Material	Installation (lbs.)	Pushout (lbs.) (2)	Max. Load (lbs.) (3)	Pull Thru (lbs.)
	4	9	6	3	6	5052-H34 Aluminum	1800	140	8	80
		8	4	10		1800	180	13	80	
	6	10	8	5.5	11	5052-H34 Aluminum	2500	175	12	85
		10	5.5	17		2500	235	16	85	
	8	12	9	6.5	18	5052-H34 Aluminum	3100	205	13	105
		12	8.0	20		3100	255	21	105	

METRIC	Screw Size Code	Height Code	Length Code	Thread Forming Torque (N•m)	Max. Rec. Tightening Torque (N•m)	Test Sheet Material	Installation (kN)	Pushout (lbs.) (2)	Max. Load (N) (3)	Pull Thru (N)
	M3	7	4	.17	.56	5052-H34 Aluminum	7.1	556	27	356
		6	.23	1.02		7.1	756	44	356	
	M4	9	7	.56	2.26	5052-H34 Aluminum	13.3	890	76	423
		9	.56	2.83		13.3	1045	107	423	

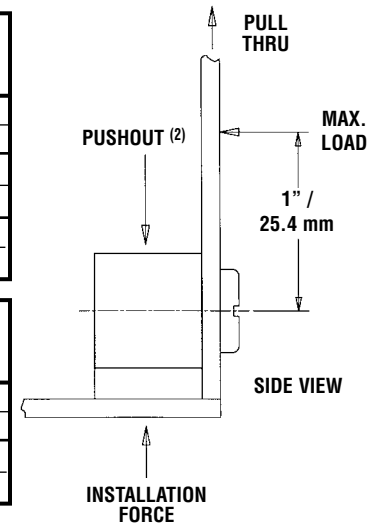

### Type RAS

UNIFIED	Thread Code	Height Code	Length Code	Test Sheet Material									
				5052-H34 Aluminum					Cold-rolled Steel				
				Max. Rec. Tightening Torque (in. lbs.)	Installation (lbs.)	Pushout (lbs.) (2)	Max. Load (lbs.) (3)	Pull Thru (lbs.)	Max. Rec. Tightening Torque (in. lbs.)	Installation (lbs.)	Pushout (lbs.) (2)	Max. Load (lbs.) (3)	Pull Thru (lbs.)
440	9	4	13	1800	100	7	80	16	2400	180	9	80	
		6	17	1800	145	8	80	17	2400	260	9	80	
		8	17	2100	180	13	80	17	3000	315	15	80	
632	10	4	20	2000	100	7	85	20	2500	190	9	85	
		8	21	2500	190	12	85	26	3200	335	16	85	
		10	21	2800	230	16	85	26	4000	385	20	85	
832	12	6	20	2400	140	15	100	27	3200	260	11	100	
		9	23	3300	195	16	100	29	4200	345	20	100	
		12	30	3500	260	20	100	35	4700	420	27	100	

METRIC	Thread Code	Height Code	Length Code	Test Sheet Material									
				5052-H34 Aluminum					Cold-rolled Steel				
				Max. Rec. Tightening Torque (N•m)	Installation (kN)	Pushout (N) (2)	Max. Load (N) (3)	Pull Thru (N)	Max. Rec. Tightening Torque (N•m)	Installation (kN)	Pushout (N) (2)	Max. Load (N) (3)	Pull Thru (N)
M3	7	3	1.47	8	423	36	356	2.26	10.7	778	40	356	
		4	1.92	8	534	36	356	2.71	10.7	1001	40	356	
		6	2.15	9.3	756	58	356	2.71	13.3	1312	67	356	
M4	9	4	2.15	8.9	556	53	423	3.28	11.6	956	44	423	
		7	2.6	13.3	890	76	423	4.07	16	1512	80	423	
		9	2.83	13.3	1112	93	423	4.52	18.7	1846	116	423	

(1) The installation, pushout, and side-load values reported are averages when all installation specifications and procedures are followed. Variations in mounting hole size, sheet material and installation procedure will affect this data. Performance testing of this product in your application is recommended. We will be happy to provide samples for this purpose.


(2) Pushout test is conducted without side panel attached to R'ANGLE fastener.

(3) 1" / 25.4 mm from screw centerline.

# INSTALLATION

1. Punch a properly sized rectangular mounting hole in the sheet. Do not perform any secondary operations such as deburring.
2. Place the fastener through the mounting hole and into the anvil as shown in the drawing to the right.
3. With the punch and anvil surfaces parallel, apply a squeezing force until the bottom of the fastener becomes flush with the sheet.

\* NOTE: The punch must be large enough to cover the entire base of the fastener to ensure proper installation.

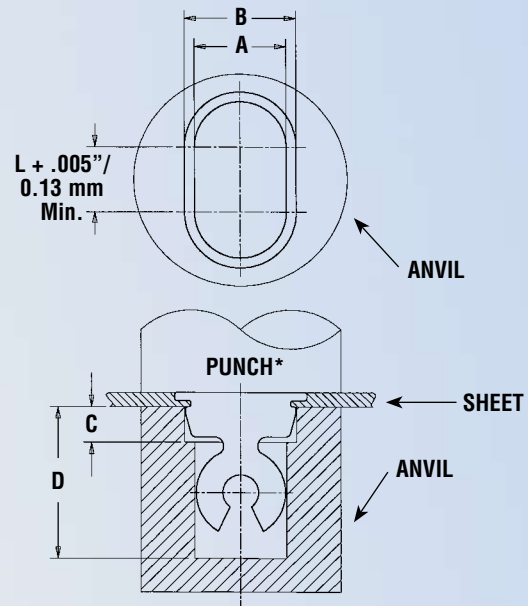


Installation tooling is available from PennEngineering.

## Anvil Dimensions

UNIFIED	Screw or Thread Size Code	Anvil Dimensions (in.)				Anvil Part Number
		A ±.001	B ±.001	C ±.005	D Min.	
	4 / 440	.257	.313	.100	.425	8002711
	6 / 632	.307	.376	.100	.500	8002712
	8 / 832	.357	.407	.100	.575	8003642

METRIC	Screw or Thread Size Code	Anvil Dimensions (mm)				Anvil Part Number
		A ±0.03	B ±0.03	C ±0.1	D Min.	
	M3	6.53	8.02	2.54	10.8	8002713
	M4	9.07	10.03	2.54	12.7	8002714

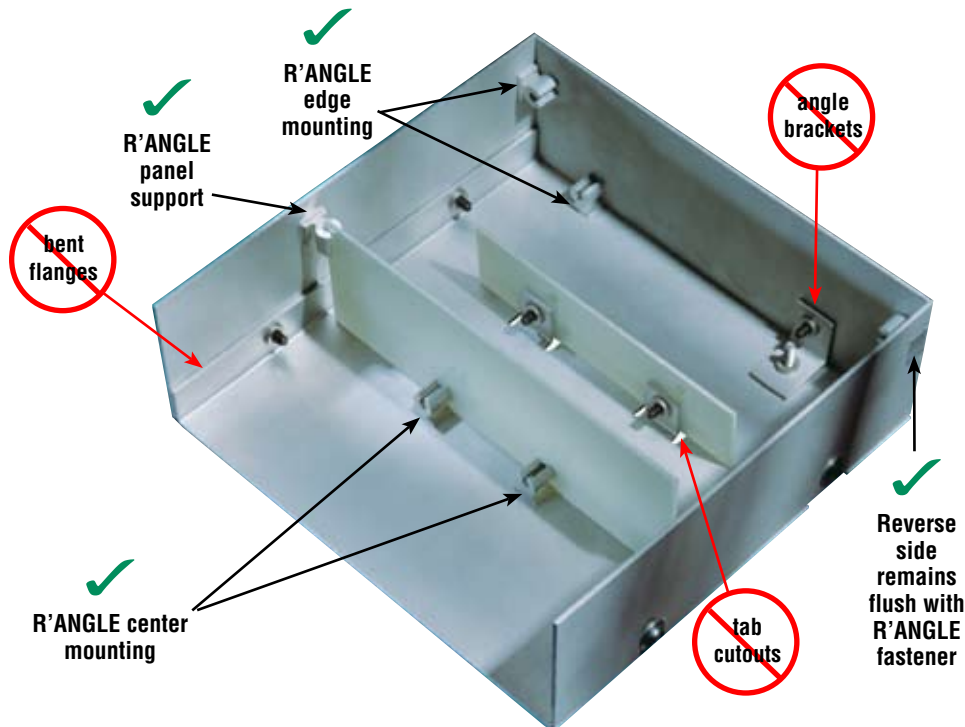

RoHS compliance information can be found on our website.  
© 2009 PennEngineering.

Specifications subject to change without notice.  
Check our website for the most current version of this bulletin.

**PennEngineering®**



**North America:** Danboro, PA USA • E-mail: info@pemnet.com • Tel: +1-215-766-8853 • Fax: +1-215-766-0143 • 800-237-4736 (USA Only)  
**Europe:** Galway, Ireland • E-mail: europe@pemnet.com • Tel: +353-91-751714 • Fax: +353-91-753541  
**Asia/Pacific:** Singapore • E-mail: singapore@pemnet.com • Tel: +65-6-745-0660 • Fax: +65-6-745-2400  
 Shanghai, China • E-mail: china@pemnet.com • Tel: +86-21-5868-3688 • Fax: +86-21-5868-3988

Visit our PEMNET™ Resource Center at [www.pemnet.com](http://www.pemnet.com)